

## MULTI-WEDGE 45 'S'

**SELF-SEALING**

**MERV 9**



### **MEDIA DESIGNED TO LAST**

Fiber Bond Multi-Wedge filters are made with a tough, high density polyester media manufactured at Fiber Bond.

Resistant to high humidity, oil mists, acids, alkalies and most organic solvents.

### **HEAT SEAL CONSTRUCTION**

All perimeter edges and internal dividers are permanently welded together. This dielectric process assures a leak proof self-supporting pocket. No needle holes for dirt migration downstream.

### **SELF-SEAL FRONT LOAD DESIGN**

The positive edge self sealing design is used in conventional front access systems.

The overlapping media tightly pressure fits against the holding frame. No by-pass around the filter.

### **SPOR-AX - NO EARLY CHANGE OUTS**

Spor-Ax controls the growth of mold, mildew, algae and fungi on the filter.

Mold build up on filter media will increase resistance. No early or unanticipated filter purchases and change out.

### **WHY MULTI-WEDGE 45 'S'**

- ◆ WELDED HEAT SEALED POCKETS
- ◆ MOISTURE RESISTANT
- ◆ 100% SYNTHETIC MEDIA
- ◆ SPOR-AX® ANTIMICROBIAL
- ◆ MERV 9
- ◆ 12" & 20" DEPTH

### **APPLICATIONS**


- ★ HOSPITALS
- ★ OFFICE BUILDINGS
- ★ AIRPORTS
- ★ FOOD PROCESSING
- ★ UNIVERSITIES
- ★ HOTELS
- ★ RESTAURANTS
- ★ MEDICAL BUILDINGS

**"THE BEST FILTERS  
COME FROM THE BEST MEDIA"**


# TECHNICAL DATA

- MERV 9 - ASHRAE 52.2-1999
- Operating temperature up to 200° F.
- Initial Resistance (w.g.) at 492 fpm: 12 inch -0.27", 20 inch -0.23"
- Recommended discard point 1.0" wg
- Underwriter's Laboratories Class 2

**RESISTANCE VS AIRFLOW**

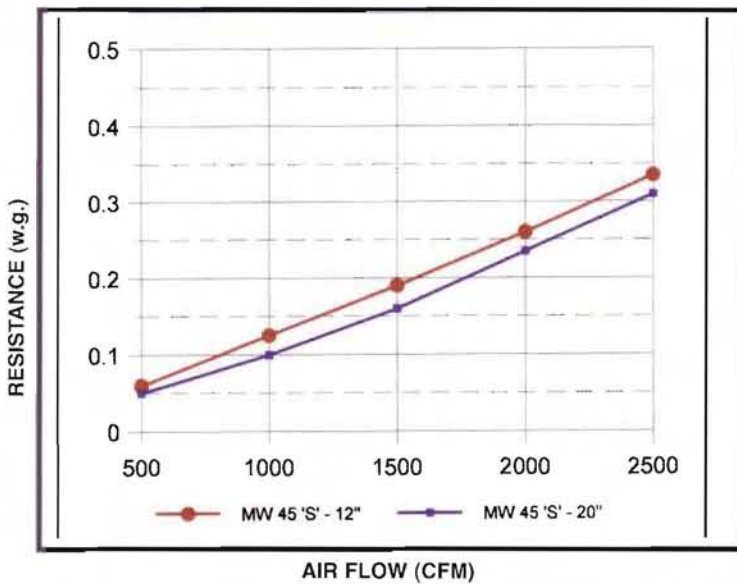

**REMOVAL EFFICIENCY VS PARTICLE SIZE**

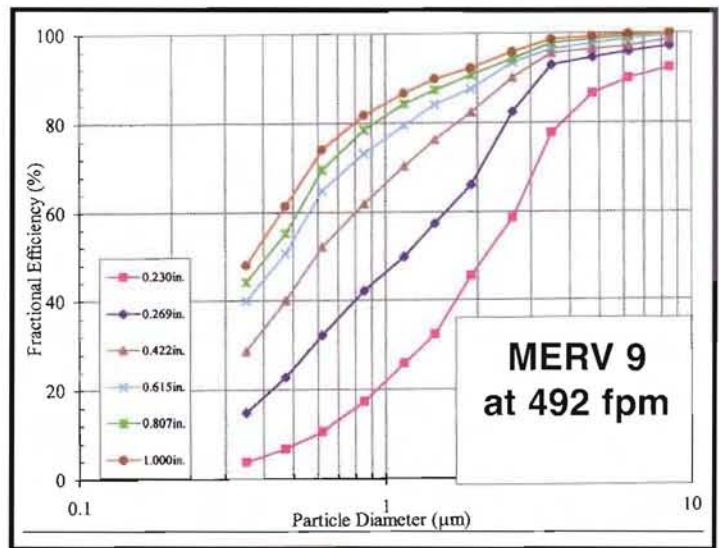

Particle Size Removal Efficiency Conducted by LMS Technologies.



100% welded heat sealed perimeter edges and internal seals assure a leak-proof construction.



Overlapping media pressure fits against frame preventing dirt by-pass.



Fiber Bond Multi-Wedge 45  
Also Available in a Header Design.

Spor-Ax® is a registered trademark of Fiber Bond Corporation.

Fiber Bond Corporation 110 Menke Road Michigan City, IN 46360  
Tel: (219) 879-4541 Fax: (219) 874-7502 www.fiberbond.net email: info@fiberbond.net  
Form # FB02 2.5M 5/07